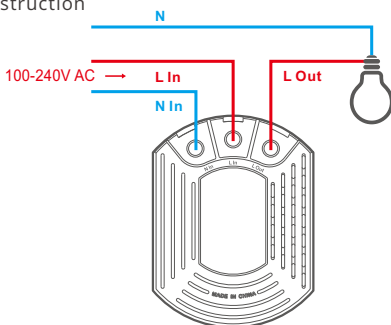# Operating Instruction

1. Power off

⚠ To avoid electric shocks, please consult the dealer or a qualified professional for help when installing and repairing! Please do not touch the switch during use.

2. Wiring instruction

N

100-240V AC →   **L In**   **L Out**

N In

ⓘ The device can only connect incandescent light bulb and dimmable LED light.

ⓘ Make sure the neutral wire and live wire connection is correct.

3. Download APP

🔍 | eWeLink

 Download on the
 App Store

 GET IT ON
 Google Play

Android™ & iOS

4. Power on

After powering on, the device will enter the quick pairing mode (Touch) during the first use. The connected light enters the "breathing mode".

ⓘ It will exit the quick pairing mode (Touch) if the device is not paired within 3mins. If you need to enter this mode again, please power off and restart the device until the connected light enters the "breathing mode".

5. Add the device
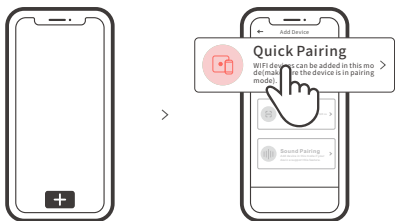
Tap "+" and select " Quick Pairing ", then operate following the prompt on the app.

Pairing method for the device and SONOFF RM433 remote controller:

< RM433

Short press any button on the RM433 remote controller within 5s after powering on until you hear "Bi", which indicates all buttons are paired successfully.

ⓘ The RM433 remote controller is not included, please purchase it separately.

RM433 Introduction

Buttons	Functions
⏻	On
⭘	Off
ᵒ˅	Short press for the low brightness, long press to turn down the brightness
¦˅	Short press for the medium brightness, long press to turn down the brightness
ˆıı	Short press for the higher brightness, long press to turn up the brightness
ˆııı	Short press for the high brightness, long press to turn up the brightness
🔒	Long press for 5s until you hear "Beep Beep" and release, then the remote controller is cleared successfully. After clearing code is completed, if you need to use, short press any button within 5s after powering on again and you will hear"Beep", which indicates the remote controller is paired successfully.
🛜	Long press for 5s until the connected light enters the breathing mode, which indicates the device enters quick pairing mode (Touch), then you can add the light on eWeLink APP. In quick pairing mode, you can short press any button on the remote controller to exit this mode.

Specifications

Model	D1
Input	100-240V AC 50/60Hz
Output	100-240V AC 50/60Hz
Light Load	Incandescent:200W LED:150W
Operating systems	Android & iOS
Wi-Fi	IEEE 802.11 b/g/n 2.4GHz
RF	433.92MHz
Working temperature	-10℃~40℃
Material	PC V0
Dimension	62x47x32.5mm

Features

D1 is a Wi-Fi smart dimmer switch that is used to adjust the light brightness and set various atmosphere for your room. You can remotely turn on/off light of your home anywhere, schedule it on/off, or share it with your family to control together.

Remote Control	Single/Countdown Timing	Voice Control	Share Control	Smart Scene

| 433MHz Remote Control	Stepless dimming	Scene Mode	LAN Control	Group control

Factory Reset

Turn on and off 3 times on repeatedly or delete the connected light on eWeLink APP until it enters "breathing mode", then the device is reset successfully and enters quick pairing mode (Touch).

ⓘ Please reset the device to factory defaults if you want to use other Wi-Fi networks, then reconnect the network.